

7" LIGHT-DUTY DIGITAL MONITOR

CM-709M2


- Touch Button (LED type)

- Max. 4 cameras input


- User can choose split screen (2 / 3 / 4 / H Split screen)

- 7 Languages display selection (ENG-DEU-ITA-FRA-ESP-KOR-JPN)

- Free voltage (DC 12~24V)



Remote Controller

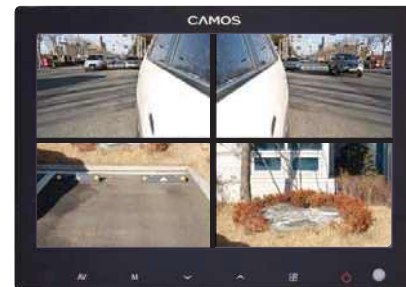


SPECIFICATION



CM - 709M2

SCREEN SIZE	7 Inch	VIDEO SIGNAL	Composite Video (CVBS) 75Ω 1Vp-p
RESOLUTION	800(W) x 3(GB) x 480(H)	AUDIO SIGNAL	MONO
BRIGHTNESS	400 cd	BUTTON	(Remote Sensor) AV / Mode / Down / Up / Menu / Power
CONTRAST RATIO	500 : 1	OPERATING TEMPERATURE	-30°C ~ 70°C
VIEW ANGLE (L/R/T/B)	70/ 70/ 50/ 70	DIMENSION (W x H x D)	174 x 125 x 27 mm
POWER SUPPLY	DC12V-24V / 450mA	WEIGHT	480g
INPUT SYSTEM	AUTO (NTSC/PAL)		

MONITOR BUTTONS

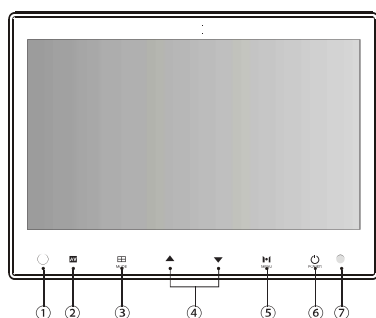

① SENSOR	IR-SENSOR for remote control signal
② AV	Switch AUX
③ MODE	Switch Screen / Select SUB-MENU
④ ▲/▼	Switch camera inputs / Select split mode / Volume control / Set SUB-MENU
⑤ MENU	Switch main menu
⑥ POWER	Power ON / Stand-by
⑦ DIMMER SENSOR	Automatic brightness control sensor

CONNECTION

